

Product Finish: Chrome

Product code: AT2235  
EAN13 barcode: 5060879994591

**Product features:**

- Traditional French provincial styling
- Quarter turn handle action for precise flow control
- Metal construction throughout
- Flow Limited to 5 Litres per Minute for Part G compliance
- Supplied complete with flexible tail pipes for fast simple fitting

**Additional information / Parts included:**

Includes additional Honeycomb 1.5gpm



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

**Product dimensions:**


- Overall, Height / projection: 247 mm
- Exit reach: 228 mm
- Exit height: 178 mm
- Centre distance(s):

- Base diameter(s): 48 x 50mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 40 mm


- Spout diameter: 20 mm
- Spout aerator size: M22 x 1

**Packaged properties:**

- Box length: 575mm
- Box depth: 80mm
- Box width: 350mm
- Units per outer: 5
- Tap only weight: 2.72kg
- Boxed weight: 3.92kg

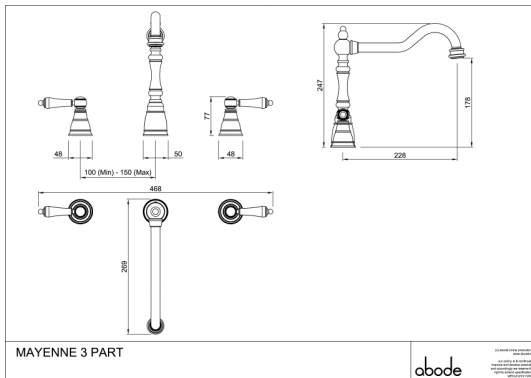

**Product flow characteristics:**

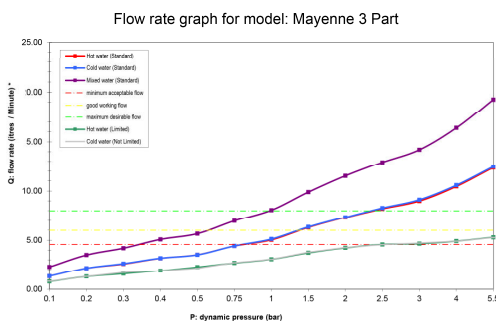

- Min / Max water pressure: 0.40 / 5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 14.20

- Control valve type: Ceramic disc QT
- Product flow characteristics: Single flow
- Non return valve(s): None

- Aerator type: Honeycomb Aerator
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M10 / M8 / 1/2" Female / M8
- Inlet pipe type / length: Flexible stainless braided hose / 365 / 400 mm

**Care instructions summary:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

**Warranty Summary (Full details available on request):**

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year