


Metix Flow Restricted Tap

abode

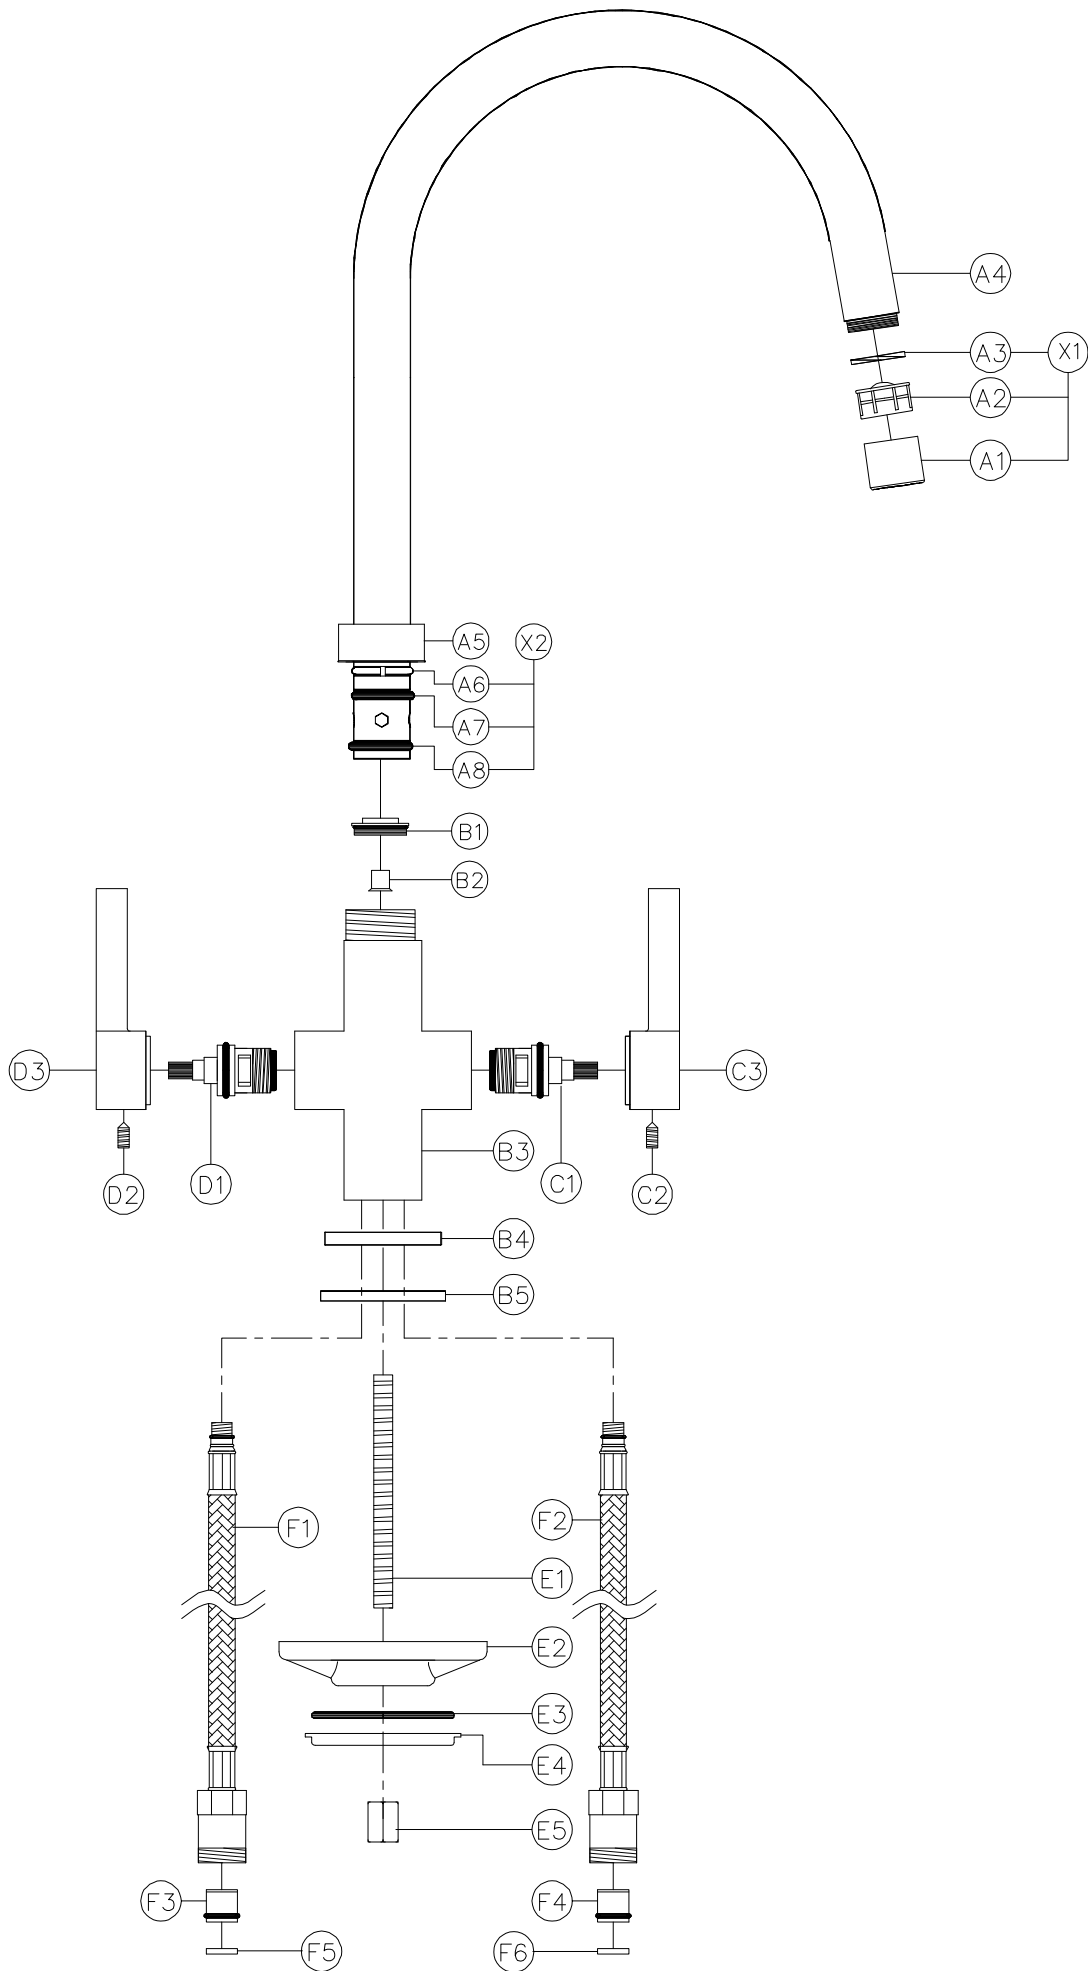

Metix Flow Restricted Tap

General Advice:

- These instructions are intended as a guide only, if you are in any doubt you should seek the advice of a qualified professional.
- Take care not to mark finished parts with screwdrivers or other tools.
- Use a pair of rubber gloves to get a better grip on decorative hand tight parts.
- Ensure all parts are reassembled tightly.
- After maintenance test that all assemblies are water tight and function correctly.
- Always isolate the hot and cold water supplies before starting any maintenance, once isolated you should drain any residual water from your system.

To replace the hot valve:

1. Loosen grub screw (D2) on the underside of handle (D3) using a 2.5mm A/F allen key.
2. Pull handle (D3) horizontally away from the body (B3).
3. Using a socket unscrew valve (D1) anticlockwise.
4. Replace the faulty valve (D1) with the new one and assemble in reverse order.

To replace the spout o-rings:

1. Loosen locking collar (A5) on the rear of the tap body (B3) by hand.
2. Pull the spout (A4) vertically away from the tap body (B3).
3. Remove upper PTFE ring (A6) and o-rings (A7) using a precision screwdriver and replace with new ones.
4. Reassemble the tap in reverse order.