

Product Finish: Chrome

Product code: AT2077
EAN13 barcode: 5060344155991



Product features:


- Metal construction throughout
- Single lever control for effortless single handed control
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting
- Touch activated cold water flow

Additional information / Parts included:

SCO06103 fixing kit

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

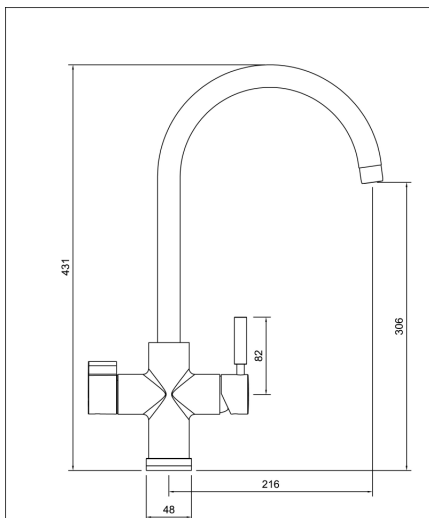

Contax Sensor Monobloc - v1



© abode home products ltd
www.abode.co.uk
our policy is to continually improve our products and services. We reserve the right to amend specifications without prior notice.

- **Overall Height / projection:** 431 mm
- **Exit reach:** 216 mm
- **Exit height:** 306 mm
- **Centre distance(s):**


- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 40 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** M22 x 1 female

Packaged properties:

- Box length:** 575mm **Box depth:** 80mm
- Box width:** 350mm **Units per outer:** 5
- Tap only weight:** 3.40kg **Boxed weight:** 4.10kg

Product flow characteristics:

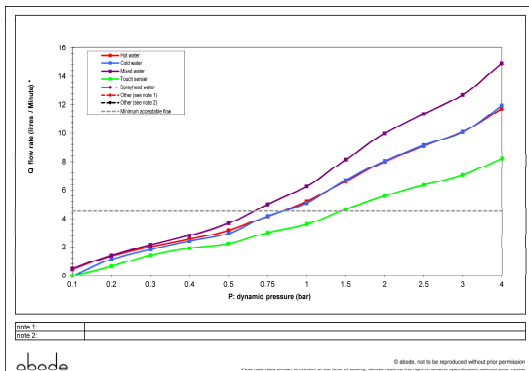

- **Min / Max water pressure:** 0.75 / 5.50 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 12.71

- **Control valve type:** Single lever ceramic cartridge/QT Cold Ceramic disc
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Integral to hot & cold inlets

- **Aerator type:** Honeycomb aerator
- **Accepts revolve / spray areator:** Yes
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M10 x 1, M8 x 1 / 1/2" BSP Female, 3/8" BSP Female

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year